


the original


# Charley-BAR Safety Lock

for SLIDING GLASS DOORS

**STOP BURGLARS!** Makes Sliding Glass Doors Jimmy-Proof. Anodized Aluminum Tubing. Comes with all necessary hardware & instructions. Can be cut to fit any size door. Available in three Lengths, three Finishes & three Packages. New security feature has been added to your Charley-Bar. We have improved the black plastic saddle to take a key so that the BAR cannot be raised from the outside by wires or other devices. This new saddle will also keep small children from opening the door from the inside. *To Use:* Insert key into slots of saddle and give a half turn. This locks in place. When not in use, key hangs down, out of the way.

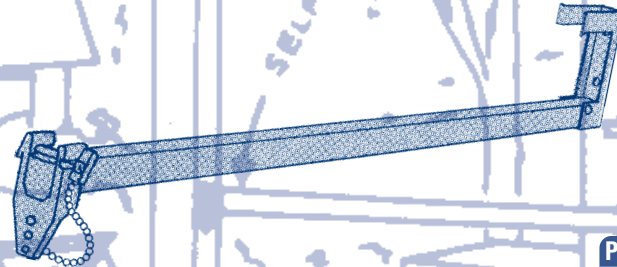

**CARDED**



**COLORS**



**HARDWARE PACK**

16-108H



**16-163**  
metal key  
w/beaded chain



**16-164**  
black plastic  
socket bracket



**16-165**  
black plastic  
cap



**16-108S**  
four #8 1/2"  
sheet metal  
screws  
(4 required)

**SLIDING PANEL**



**16-167S**  
angle bracket screw  
(2 required)

**16-167**  
Stationary Panel  
Angle Bracket

**\*Note:**

In some instances where the sliding panel is in the outside and the stationary panel is on the inside, or if both panels slide. It is necessary to mount the angle bracket on the sliding panel. (Order separately)

PART #	SIZE	COLOR
<b>BULK - 25 per carton</b>		
16-108	48"	mill
16-108B	48"	bronze
16-108W	48"	white
16-108-60	60"	mill
16-108B-60	60"	bronze
16-108W-60	60"	white
16-108-72	72"	mill
16-108B-72	72"	bronze
16-108W-72	72"	white
<b>CARDED - 10 per carton <i>sold in carton qty only</i></b>		
16-108C	48"	mill
16-108CB	48"	bronze
16-108CW	48"	white
<b>MAILING TUBE - 50 per carton <i>sold in carton qty only</i></b>		
16-108T	48"	mill
16-108TB	48"	bronze
16-108TW	48"	white
16-108T-60	60"	mill
16-108TB-60	60"	bronze
16-108TW-60	60"	white
<b>HARDWARE</b>		
16-108H	replacement hardware pk	
16-108S	hinge & socket bracket screw	
16-163	metal key w/beaded chain	
16-164	black plastic socket bracket	
16-165	black plastic cap	
16-167	metal angle bracket	
16-167S	angle bracket screw	

**1-800-352-0800 fax 610-534-3202**




**WINDOW AND DOOR HARDWARE**

the original

# Charley-BAR Safety Lock

## for SLIDING GLASS DOORS

### INSTALLATION INSTRUCTIONS

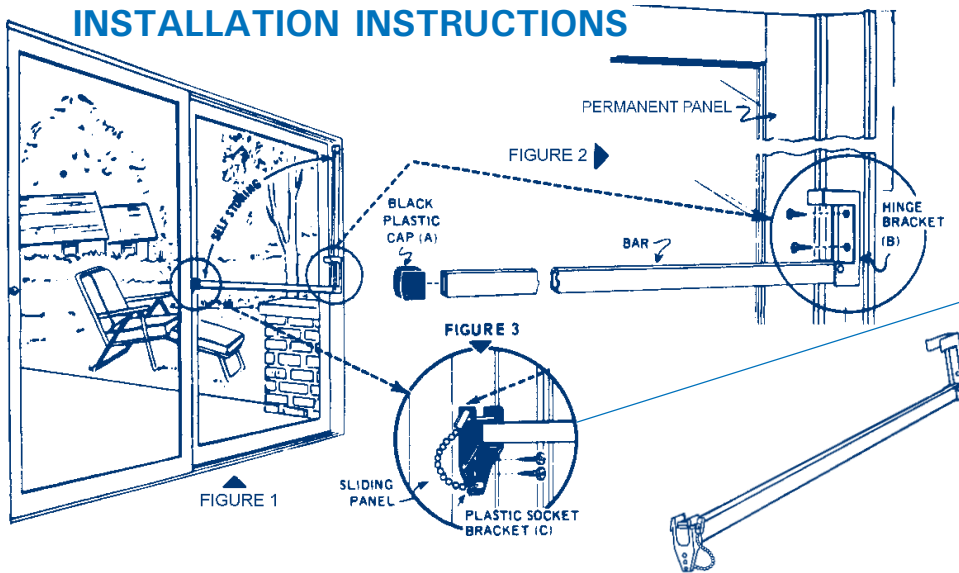

A new security feature has been added to your CHARLEY-BAR. We have improved the black plastic saddle to have a key (see figure 3)-so that the BAR cannot be raised from the outside by - wires or other devices. This new saddle will also keep small children from opening the door from the inside.

#### TO USE,

Insert key into slots of saddle and give a half turn. This locks key in place. When not in use. Key hangs down out of way.

### IMPORTANT

"Charley Bar" is meant to be used in addition to patio door lock. FOR DOORS WITH SLIDING PANEL ON THE INSIDE AND STATIONARY PANEL ON THE OUTSIDE **IMPORTANT! READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION!**

1. Slide door to closed position and lock
2. Remove Black Plastic Cap (A) from end of Bar.
3. Place "CHARLEY BAR" Hinge Bracket (B) against side of frame with clamp up and with aluminum tubing horizontal. Mark off tube to proper length and saw off 1/8" shorter to allow for black plastic cap (A) to be replaced. If cut too short, bar will be ineffective.
4. Hold hinge bracket (B) to frame making sure that hinge bracket is centered and low enough so that the bar can be swung up into upright storing position. (See Figure 1)
5. Now drill 2 holes using 1/8" drill and secure hinge bracket (B) to frame with #8 x 1/2" sheet metal screws furnished. (See Figure 2)
6. After hinge bracket (B) is securely in place, position black plastic socket bracket (C) so that bar will be level when in locked position. (See Figure 3). Drill two 1/8" holes and secure with #8 x 1/2" sheet metal screws furnished. Be careful NOT to drill too deep, so drill bit will not hit the glass.
7. When "CHARLEY BAR" is properly installed you should not be able to move sliding panel.

### NOTE

In some instances where the sliding panel is on the outside and the stationary panel is on the inside, or if both panels slide, it is necessary to mount a angle bracket (Not furnished order seperatly). See details at left.

