Quanex Super Spacer®

66 Foot Rolls

Super Spacer® Premium Plus - 1/4" Thick

A flexible, silicone foam spacer product. Super Spacer® provides the maximum in perimeter insulation for sealed glazing units and prevents condensation. Desiccant-filled with pre-applied side adhesive, the structural foam spacer significantly simplifies insulating glass (IG) production.

Super Spacer® Premium - 3/16" Thick

Featuring a vapor barrier backing, the product must be used in combination with conventional IG sealants such as hot melt butyl, polyurethane and solvent-free polysulfide. Dual seal equivalent sealants may also be used.

Energy efficient Super Spacer®
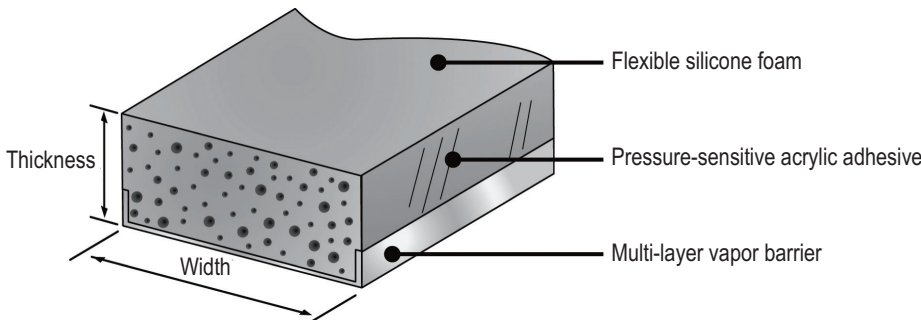
Enhanced Features Include:
- Up to 30% lower thermal conductivity
- Superior long-term durability
- The warmest edge of glass temperature
- The highest NFRC Condensation Resistance rating

1/4" Thick Super Spacer Premium Plus

Gray	Black	Width
92-502	92-502B	3/16"
92-503	92-503B	1/4"
92-505	92-505B	3/8"
92-507	92-507B	1/2"
92-509	92-509B	5/8"

3/16" Thick Super Spacer Premium

Gray	Black	Width
92-515	92-515B	3/16"
92-529	92-529B	1/4"
92-522	92-522B	5/16"
92-523	92-523B	3/8"
92-524	-	7/16"
92-517G	92-517B	1/2"
92-525	92-525B	9/16"
92-526	92-526B	5/8"
92-527	-	11/16"
92-528	92-528B	3/4"

Edgetherm® 3500 Single-Part Butyl Sealant
Part Number: 92-531B

Quanex's Edgetherm® 3500 is a single-part butyl-based sealant that sets quickly from its molten state, allowing units to be moved from their assembly locations between two and five minutes after application and glazed the same day. A combination of high output and fast heat-loss properties reduce the risk of corner defects for a complete seal around the unit.

Features:
- Blend of butyl rubber with other synthetic polymers and resins, which contain no volatile materials
- Available in black
- Can be used as a secondary seal in conjunction with a PIB primary sealant

Benefits:
- Low moisture vapor transmission rate (MVTR)
- Quick setting from molten state
- Compatible with all types of manual and robotic dispensing equipment
- Clean application with no waste (no cleaning or purging of dispensing equipment required)

Thickness — Flexible silicone foam
Width — Pressure-sensitive acrylic adhesive
— Multi-layer vapor barrier

Contact Account Managers for our Bulk Roll Program!

Philadelphia   **Miami**   **Reno**

PHILADELPHIA: 2006 Elmwood Avenue • Sharon Hill, PA 19079 • 800-352-0800 • Sales Fax: 610-534-3202
MIAMI: 500 West 84th Street • Hialeah, FL 33014 • 800-780-5051 • Fax: 305-557-5239
STRYBUC.COM | CSERVICE@STRYBUC.COM